

**INSTALLATION
INSTRUCTIONS**

FIXTURE TYPE _____

**PAR BAFFLE SUPPLEMENT
66N00 & 86N00**

PART
NO. 510118-1000

Pg. 1
OF 1


DO NOT MODIFY OR ALTER THIS PRODUCT IN ANY WAY, OR INSTALL IN ANY FASHION WHICH IS CONTRARY TO THE INSTRUCTIONS CONTAINED HEREIN.
IF YOU HAVE ANY QUESTIONS REGARDING THIS PRODUCT OR THE INSTALLATION OF IT, PLEASE CALL LITECONTROL ENGINEERING AT 617-294-0100 (781-294-0100 as of 9-1-97).

GENERAL NOTES:

- A) This sheet is used with fixture installation instructions.
- B) PAR Baffles are shipped installed in fixtures.

INSTRUCTIONS: (Read sheet before installation)

1. Remove Baffle from fixture by rotating (4) quarter turn fasteners until they disengage from retaining clips in socket plates.
Note: do not remove fasteners from baffle assembly.
2. Remove Reflector from fixture by taking out (4) sheet metal screws.
This will allow access to fixture wireway.
3. Install fixture per its applicable instruction sheet.
4. Replace reflector and install lamp (by others).
5. Re-install baffle making sure all quarter turn fasteners are fully engaged.
Baffle should not be exposed below bottom rail of fixture.

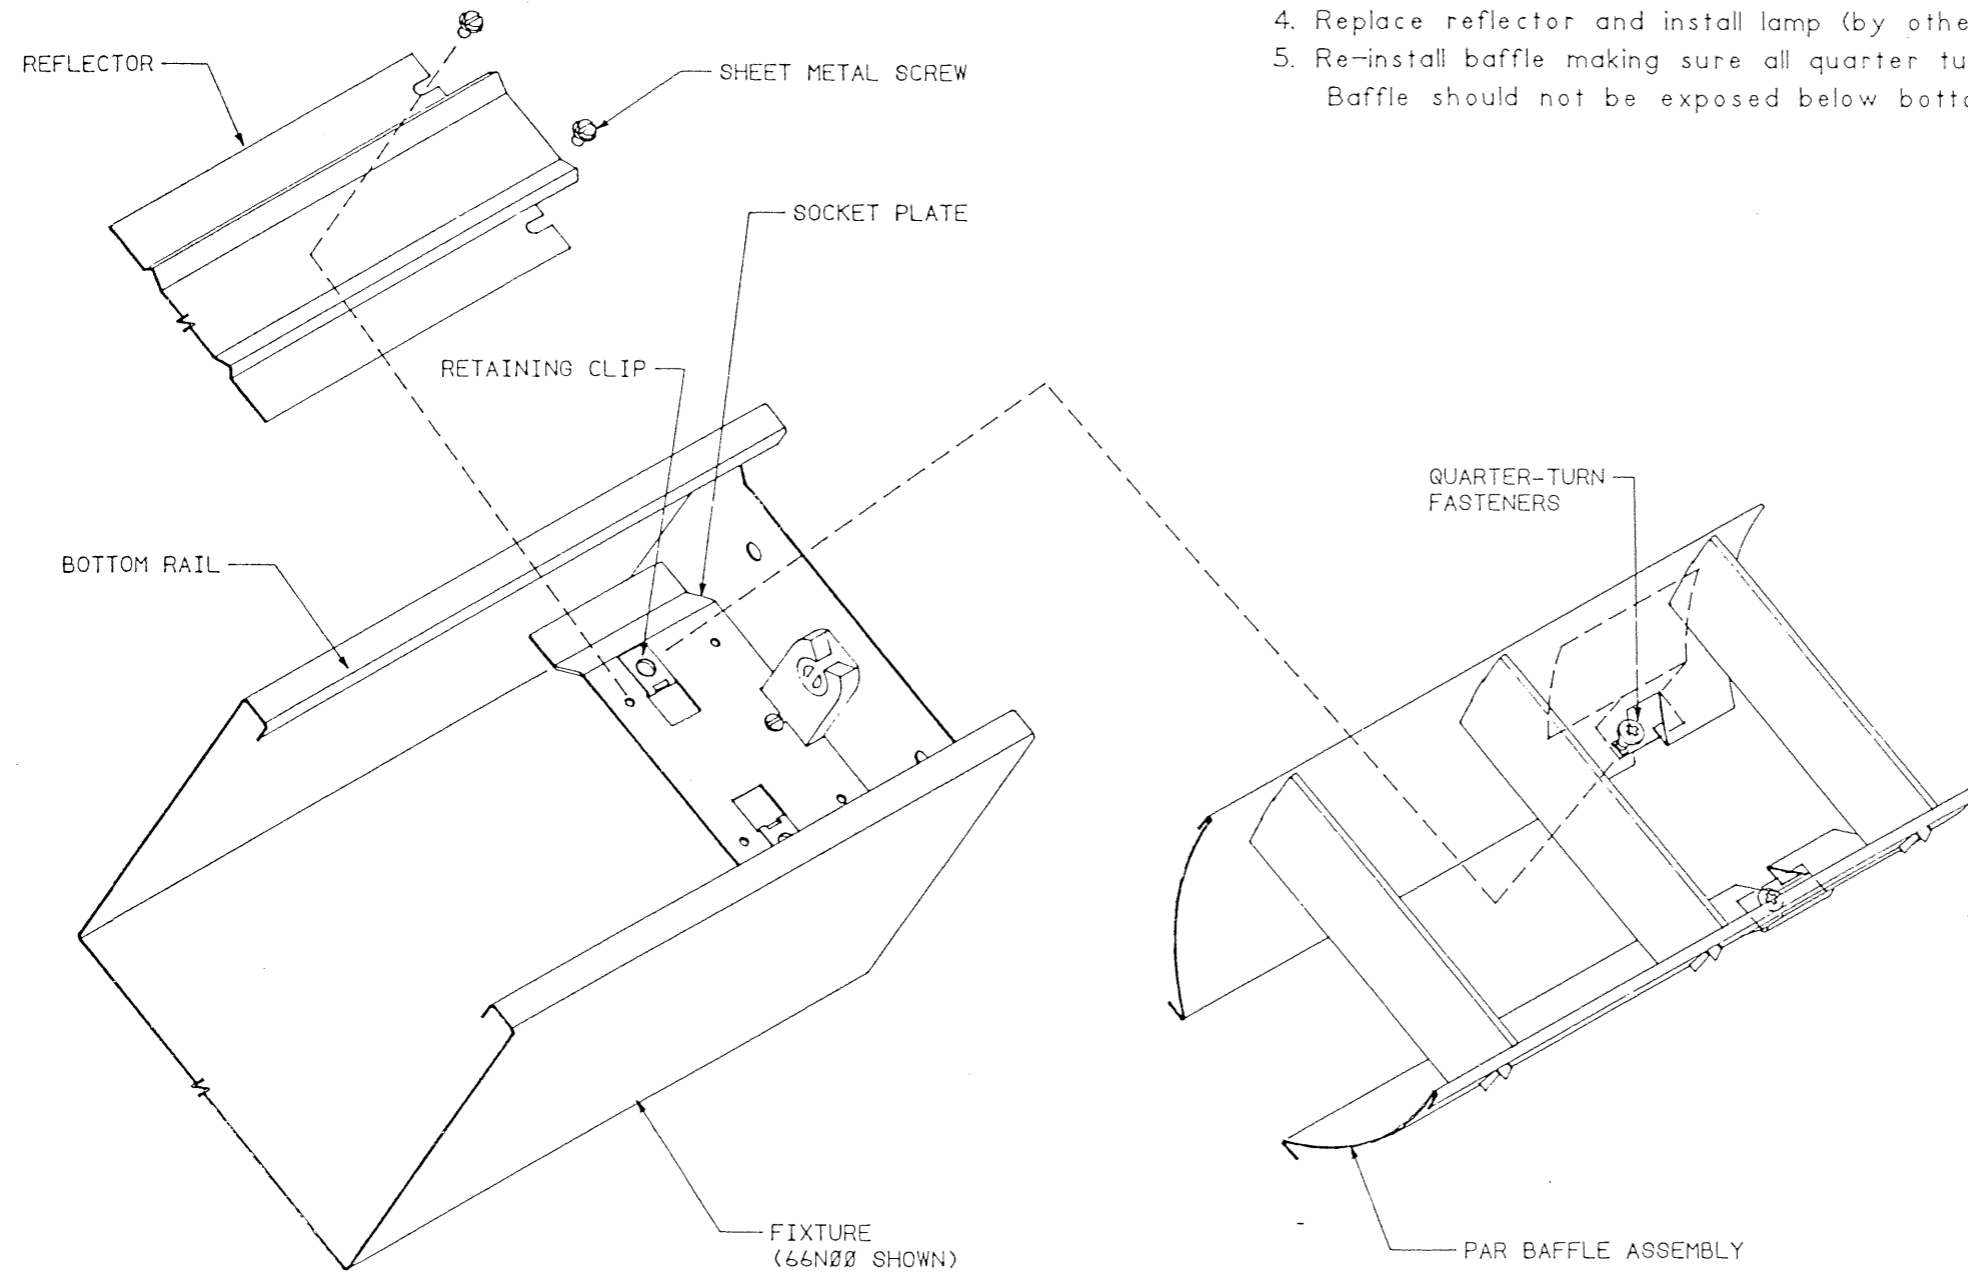

LITECONTROL

100 HAWKS AVENUE - PO BOX 100 - HANSON MA 02341, (617-294-0100, 781-294-0100 as of 9-1-97)