

**Aura™**  
P-D-3800, S-D-3800  
Pendant-Mounted Direct  
Surface-Mounted Direct


## Product Description

Part of the Inde-Pendant family of round fixtures, Aura offers a clean metal rim with a flat lens bottom, available in three sizes. This fixture is Cradle to Cradle Silver Certified™ by MBDC.

## Ordering Guide

Product, Lamping, & Length						Options					
<b>P -</b>	<b>D -</b>	<b>38</b>	<b>M</b>	<b>3</b>	<b>0</b>	<b>T8U6 -</b>	<b>FP -</b>	<b>TCWM -</b>	<b>ELB10 -</b>	<b>F -</b>	<b>120</b>
Mounting	Distribution	Series	Diameter	Lamp Count	Nominal Length(ft)	Lamp Type	Diffuser	Finish	Ballast	Other options	Volts
<b>P</b> Pendant-Mounted <b>S</b> Surface-Mounted	<b>D</b> Direct	<b>38</b>	<b>S</b> → <b>M</b> → <b>L</b> →	<b>1</b> <b>3</b> <b>5</b> see notes	<b>0</b>	<b>T8U6</b>	<b>FP</b>	<b>TCWM</b> (Textured Matte White) is standard  see <i>LiteColors™</i> for other finishes	<b>ELB10</b> is standard  <b>DA/MK7</b> see notes	<b>F LP/EF</b>  see <b>Other options</b>	<b>120</b> <b>277</b>
<b>Suspension P65/ACC X"</b> See Planning for installation for description. Specify Dimension "X" from ceiling to top of fixture with order.											

**P-D-38M30T8U6-FP-TCWM-ELB10-F-120-P65/ACC35"** is a typical catalog number for a medium diameter 3-lamp direct T8U6 fixture with white acrylic lens, textured matte white finish, electronic ballast, fuse, 120 volts and combination stem/cable mounting with 35 1/4" suspension.

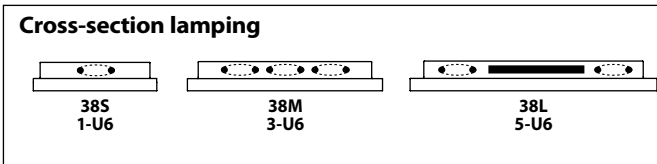

## Diameter


- S** Small diameter is 31 3/4"
- M** Medium diameter is 37 1/2"
- L** Large diameter is 49 1/2"

## Ballast Options

Specify in place of **ELB10**  
**DA/MK7** Dimming electronic ballast, Advance Mark VII.

## Other Options

- F** Fuse. Slow or fast blow, determined by Litecontrol.
- LP/EF** Low profile emergency fluorescent ballast.

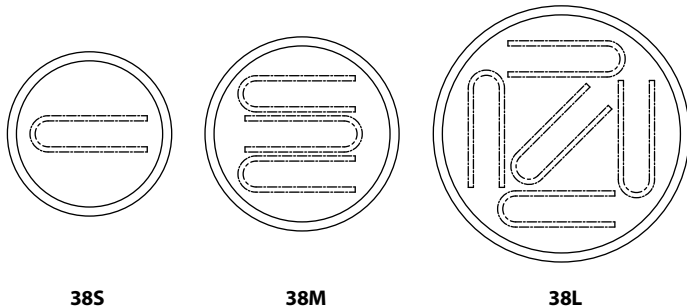

## Questions to Ask

- Diameter of fixture?
- White, LiteColor, or special color?
- Other options?
- Dimension "X": advise length and type of suspension required.

Click on  
**Quick Find 38**  
  
litecontrol.com

## Specifications

**HOUSING.** Housings are cold rolled spun steel. Small diameter is 31 3/4"; medium diameter is 37 1/2" and large diameter is 49 1/2". Housing has 1/4-20 nuts welded to inside of housing.

**DIFFUSER.** Flat Plastic (FP) lens as downlight shield.

**LAMPING.** T8 U-lamp with 6" leg spacing.

**BALLAST.** Electronic Ballast (ELB10), high power factor, thermally protected Class P, Sound Rated A, manufactured by a UL Listed manufacturer, as available, determined by Litecontrol. The minimum number of ballasts will be used.


**BALLAST DISCONNECT.** Fixture comes equipped with a ballast disconnect device that consists of a polarized male-female plug set wired between the ballast and the branch circuit conductors supplying the fixture.

**SUSPENSION.** Each fixture is suspended with one P6S stem plus three aircraft cables and an intermediate retaining plate. The minimum recommended total suspension length is 20 1/4".

**CERTIFICATION.** Fixture and electrical components are UL and/or CUL Listed (UL LISTED) and bear the I.B.E.W., A.F. of L. label. This fixture is Cradle to Cradle Certified<sup>CM</sup> Silver by MBDC.

Note: Litecontrol reserves the right to change specifications without notice for product development and improvement.

## Planning for installation

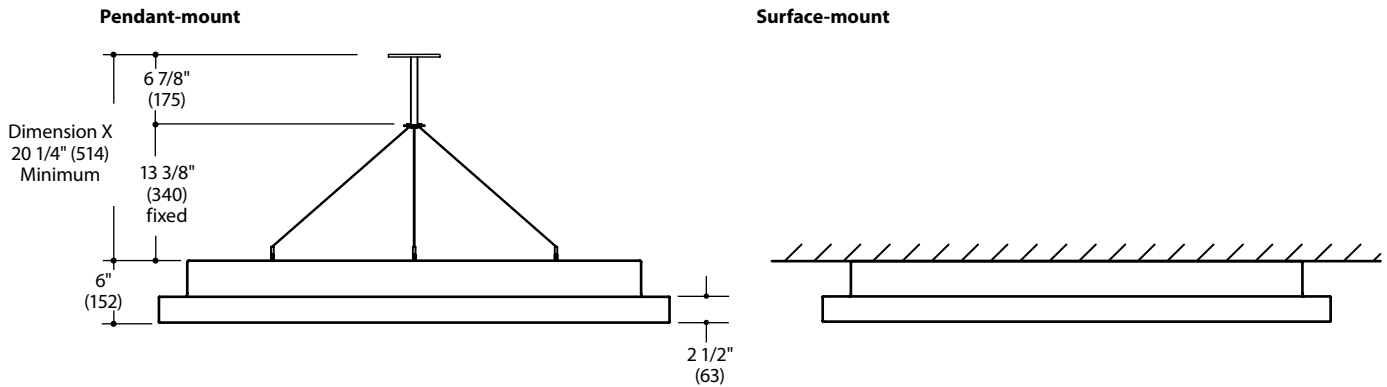

### Suspension Assembly & Mounting:

#### P6S/ACC

Provided with a combination P6S (5/8" diameter) stem and three-cable(3/32" diameter aircraft cable) assembly. The stem mounts to a 3 1/2" octagonal x 2 1/8" deep outlet box independently supported above the ceiling plane. The outlet box is then covered by a 5" diameter x 1/4" deep canopy (provided).

### Suspension Length:

#### P6S/ACC

Per the diagram above, specify the dimension "X" for ceiling-to-top-of-fixture suspension length. Standard lengths for dimension "X" available for Aura are: 20 1/4", 23 1/4", and 35 1/4". The standard length of the aircraft portion of the suspension is 13 3/8", and the stem length will be determined by Litecontrol to complete the specified total suspension dimension "X". The aircraft cable attachments provide vertical adjustment to the overall suspension of about 1/2". For special suspension requirements, including dimensions "X" other than those listed above, contact factory.

LITECONTROL

100 Hawks Avenue Hanson, MA 02341  
781 294 0100 f: 781 293 2849 litecontrol.com

