

Mod-22[™]xa



Design elements

- | Small profile with clean lines
- | T8, T5 & T5HO lamps
- | Four distribution options
- | Extruded aluminum housings
- | Painted or anodized
- | Lens or baffle option
- | On-module mounting







P-S/I-0200



P-D-0200

Performance

Configuration	Optics	Ind%/ Dir%	Efficiency (%)
P-I-0200  1-lamp T5HO		100/0	92.2
P-ID-0200  1-lamp T8 Uplight 1-lamp T8 Downlight	SGL	57/43	73.1
P-D-0200  1-lamp T8	SGL	0/100	58.8
P-S/I-0200  1-lamp T5HO	BW	87/13	89.0


For further photometric information, see website.



Pendant Mounted

P-I-0200, P-D-0200, P-ID-0200, P-S/I-0200



Distribution

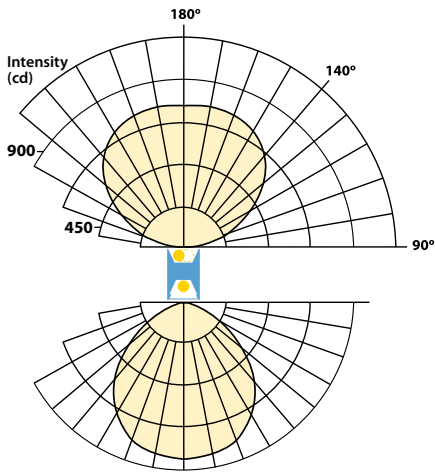

1-lamp T8 uplight
1-lamp T8 downlight BW
P-ID-0200

Mod-22xa™

Mod-22xa is a small-scale extruded aluminum fixture family that is available with three lamp choices in four distribution options, allowing for greater design flexibility. The Mod-22xa small housing provides a clean, minimalist look in both small and large spaces.

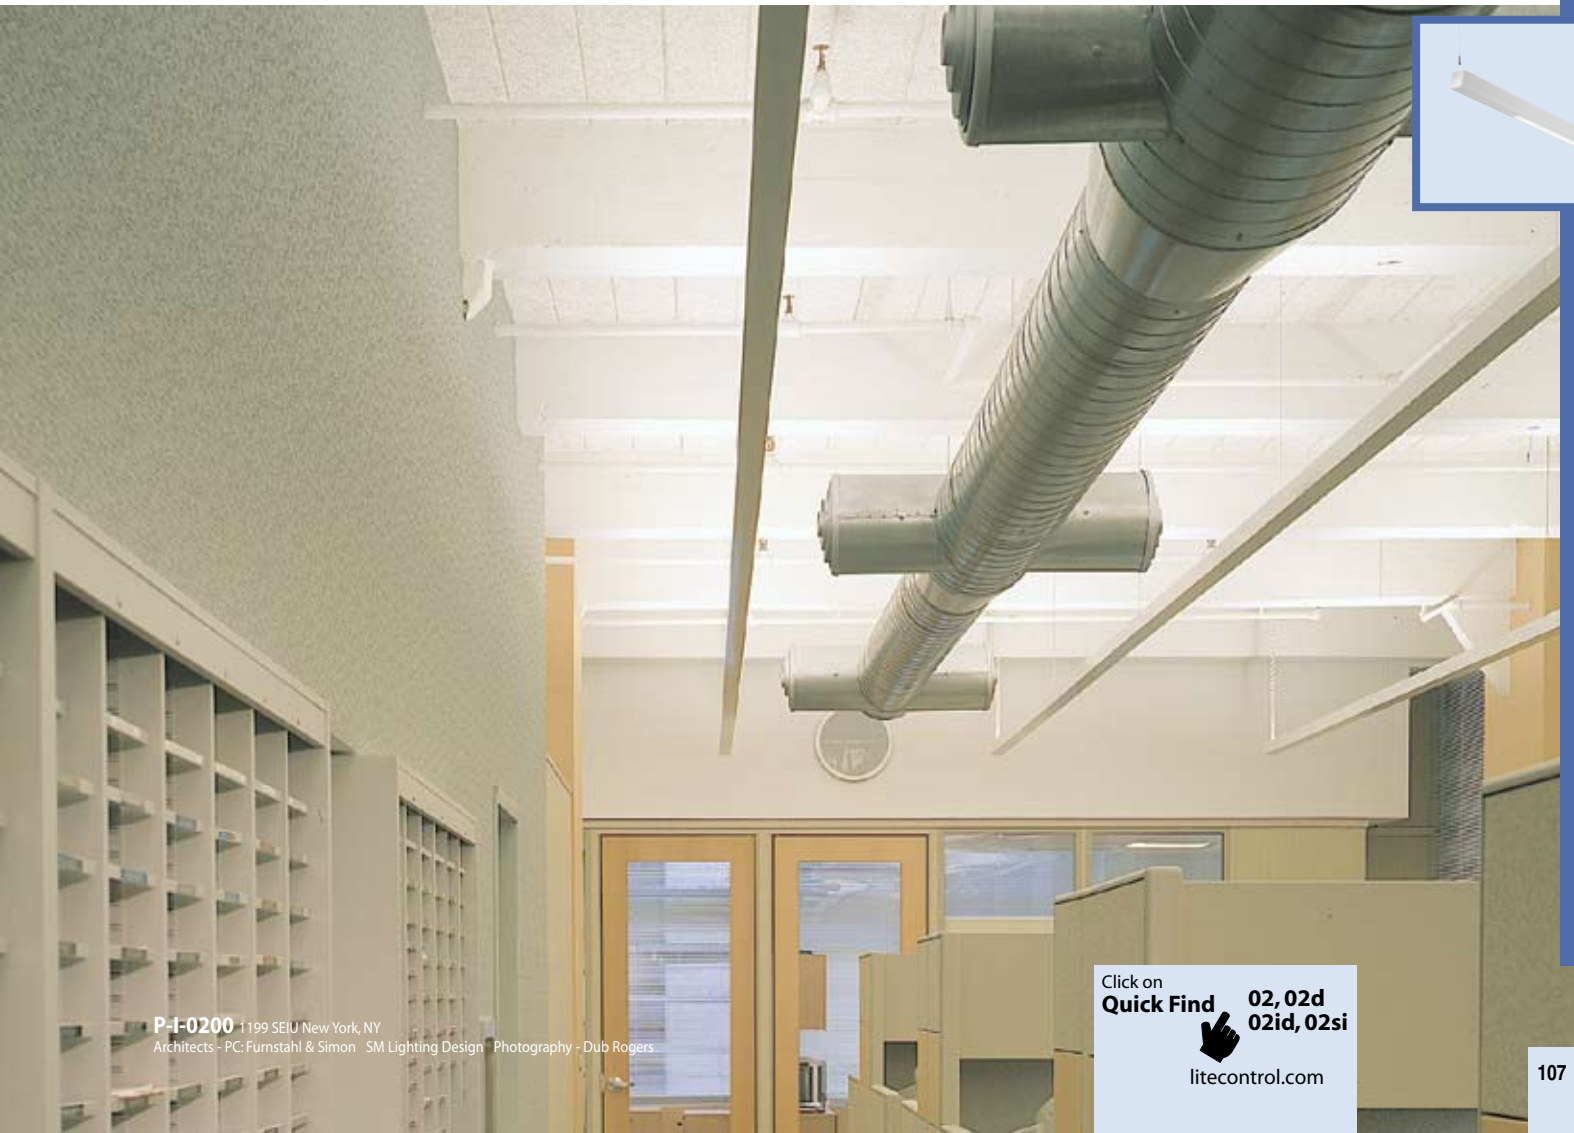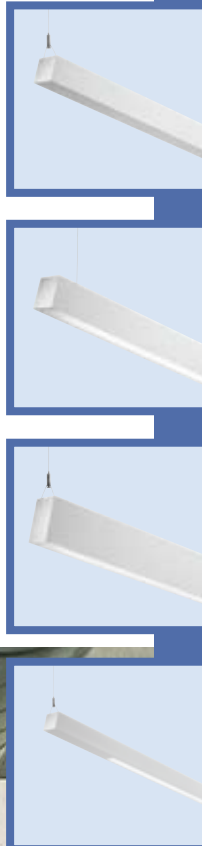

Mod-22^{xa}

P-I-0200

Product description

One-piece extruded aluminum housing with a die-formed steel reflector. The reflector finish is high-reflectance white paint. UL Listed. Cradle to Cradle Certified.^{CM}

Ordering guide

Product, Lamping, & Length					Options														
P -	I -	02	2	8	T8 -	TCWM -	ELB10 -	F -	120										
Mounting	Distribution	Series	Lamp Count	Nominal Length (ft)	Lamp Type	Finishes	Ballasts	Other Options	Volts										
P Pendant-mounted	I Indirect	02	<table border="1"> <tr><td>1 →</td><td>3</td></tr> <tr><td>1 →</td><td>4</td></tr> <tr><td>2 →</td><td>6</td></tr> <tr><td>2 →</td><td>8</td></tr> <tr><td>3 →</td><td>12</td></tr> </table>	1 →	3	1 →	4	2 →	6	2 →	8	3 →	12		T8 T5 T5HO	CAA (clear anodized aluminum) TCWM (textured matte white) are standard see LiteColors™ in product guide for other finishes	ELB10 is standard for T8 LP/ELB is standard for T5 & T5HO DA/MK7 DL/ECO DO/HEL LPD/CS/e see Ballast Options	F LP/EF see Other Options	120 277
1 →	3																		
1 →	4																		
2 →	6																		
2 →	8																		
3 →	12																		
Mounting - add to end of catalog number Aircraft cables <input type="checkbox"/> FAI/ACC (field adjustable) standard			see notes					notes: Lamp count = total number of lamps in the fixture For ordering guide information in shaded areas, choose selection by reading ACROSS the shaded areas for correct specifications.											

P-I-0228T8-TCWM-ELB10-F-120-FAI/ACC is the catalog number for a 2-lamp (1 lamp in cross-section) 8-foot long indirect T8 fixture, textured matte white finish, with an electronic T8 ballast, fuse, 120 volts, mounted with field adjustable aircraft cables..

Finishes

CAA Clear anodized aluminum
TCWM Textured matte white paint

Ballast Options

ELB10 Electronic ballast
LP/ELB Low-profile electronic ballast
DA/MK7 Advance Mark VII dimming ballast
DL/ECO Lutron ECO-10 dimming ballast
DO/HEL Osram Sylvania dimming ballast
LPD/CS/e Lutron EcoSystem dimming ballast

Other Options

F Fuse
LP/EF Low-profile emergency fluorescent ballast

See litecontrol.com for complete product specifications, including details on row joining, system connectors, suspension and mounting for different ceiling types (as applicable).

Note: Litecontrol reserves the right to change specification without notice for product development and improvement.

Click on **Quick Find** **02**



litecontrol.com



P-I-0200

Mod-22xa™



Performance

Configuration

Efficiency (%)

P-I-0200




1-lamp T5HO

92.2


1-lamp T8

79.8

T5 or T5HO lamping



T8 lamping



Mod-22^{xa}

P-D-0200

Product description

One-piece extruded aluminum housing with a die-formed steel reflector. The reflector finish is high-reflectance white paint. UL Listed. Cradle to Cradle Certified.SM

Ordering guide

Product, Lamping, & Length						Options														
P -	D -	02	2	8	T8 -	BW -	TCWM -	ELB10 -	F -	120										
Mounting	Distribution	Series	Lamp Count	Nominal Length (ft)	Lamp Type	Baffle or Diffuser	Finishes	Ballasts	Other Options	Volts										
P Pendant-mounted	D Direct	02	<table border="1"> <tr><td>1 →</td><td>3</td></tr> <tr><td>1 →</td><td>4</td></tr> <tr><td>2 →</td><td>6</td></tr> <tr><td>2 →</td><td>8</td></tr> <tr><td>3 →</td><td>12</td></tr> </table>	1 →	3	1 →	4	2 →	6	2 →	8	3 →	12		T8 T5 T5HO	BW SGL see Baffle and Diffuser Options	CAA (clear anodized aluminum) TCWM (textured matte white) are standard see LiteColors™ in product guide for other finishes	ELB10 is std. for T8 LP/ELB is std. for T5 & T5HO DA/MK7 DL/ECO DO/HEL LPD/CS/e see Ballast Options	F LP/EF see Other Options	120 277
1 →	3																			
1 →	4																			
2 →	6																			
2 →	8																			
3 →	12																			
Mounting - add to end of catalog number Aircraft cables <input type="checkbox"/> FAI/ACC (field adjustable) <i>standard</i>			see notes					notes: Lamp count = total number of lamps in the fixture For ordering guide information in shaded areas, choose selection by reading ACROSS the shaded areas for correct specifications.												

P-D-0228T8-BW-TCWM-ELB10-F-120-FAI/ACC is a typical catalog number for a 2-lamp (1 lamp in cross-section), 8-foot long direct T8 fixture with a blade white baffle, textured matte white finish, with an electronic T8 ballast, fuse, 120 volts, mounted with field adjustable aircraft cables.

Baffle and Diffuser Options

BW Blade baffles, matte white finish
SGL Soft glow lens

Finishes

CAA Clear anodized aluminum
TCWM Textured matte white paint

Ballast Options

ELB10 Electronic ballast
LP/ELB Low-profile electronic ballast
DA/MK7 Advance Mark VII dimming ballast
DL/ECO Lutron ECO-10 dimming ballast
DO/HEL Osram Sylvania dimming ballast
LPD/CS/e Lutron EcoSystem dimming ballast

Other Options

F Fuse
LP/EF Low-profile emergency fluorescent ballast

See litecontrol.com for complete product specifications, including details on row joining, system connectors, suspension and mounting for different ceiling types (as applicable).

Note: Litecontrol reserves the right to change specification without notice for product development and improvement.

Click on **Quick Find 02d**



litecontrol.com



Performance

Configuration

Optics

Efficiency (%)

P-D-0200



1-lamp T5HO

SGL

58.8




1-lamp T8

BW

57.2


Mod-22xa™

T5 or T5HO lamping



BW baffle

T8 lamping



SGL lens



Soft glow lens (SGL)

Frosted acrylic lens provides a diffused glow with no view of the lamp.

Blade baffle, white (BW)

Provides a bright, open look.



P-I-0200

Matouk Headquarters Fall River, MA
Charles Mayer Photography

Click on
Quick Find 02d




litecontrol.com



Mod-22^{xa}

P-ID-0200

T5 or T5HO lamping



Product description

Two-piece extruded aluminum housing with a die-formed steel reflector. The reflector finish is high-reflectance white paint. UL Listed. Cradle to Cradle Certified.^{CM}

Ordering guide

Product, Lamping, & Length										Options					
P -	ID -	02	Upper Lamp		Lower Lamp			SGL -	TCWM -	LP/ELB-	--	1CWQ	F -	120	
			Lamp Count	Nominal Length (ft)	Lamp Type	Lamp Count	Nominal Length (ft)								Lamp Type
P Pendant-mounted	ID Indirect/ Direct	02	1 →	3	T8	1 →	3	T8	BW SGL see Baffle and Diffuser Options	CAA (clear anodized aluminum) TCWM (textured matte white) are std. see LiteColors™ in product guide for other finishes	ELB10 is std. for T8 LP/ELB is std. for T5 & T5HO DA/MK7 DL/ECO DO/HEL LPD/CS/e see Ballast Options	-- →	1CWQ	F LP/EF see Other options	120 277
			1 →	4	T5	1 →	4	T5				TW →	2CWQ		
			2 →	6	T5HO	2 →	6	T5HO							
			2 →	8		2 →	8								
			3 →	12		3 →	12								
Mounting - add to end of catalog number Aircraft cables <input type="checkbox"/> FAI/ACC (field adjustable) <i>standard</i>			see notes			see notes									

notes:
Lamp count = total number of lamps in the fixture
For ordering guide information in shaded areas, choose selection by reading ACROSS the shaded areas for correct specifications.

P-ID-0228T5HO/28T5HO-SGL-TCWM-LP/ELB-1CWQ-F-120-FAI/ACC is a typical catalog number for a 2-lamp indirect (1 lamp in cross-section) / 2-lamp direct (1 lamp in cross-section), 8-foot long high output T5 indirect/direct fixture with soft glow lens, textured matte white finish, with a low-profile electronic T5HO ballast, one-circuit branch wiring and quick-connects, fuse, 120 volt, mounted with field adjustable aircraft cables.

Baffle and Diffuser Options

BW Blade baffles, matte white finish
SGL Soft glow lens

Finishes

CAA Clear anodized aluminum
TCWM Textured matte white paint

Ballast Options

ELB10 Electronic ballast
LP/ELB Low-profile electronic ballast
DA/MK7 Advance Mark VII dimming ballast
DL/ECO Lutron ECO-10 dimming ballast
DO/HEL Osram Sylvania dimming ballast
LPD/CS/e Lutron EcoSystem dimming ballast

Other Options

F Fuse
LP/EF Low-profile emergency fluorescent ballast

See litecontrol.com for complete product specifications, including details on row joining, system connectors, suspension and mounting for different ceiling types (as applicable).

Note: Litecontrol reserves the right to change specification without notice for product development and improvement.

Click on
Quick Find 02id



litecontrol.com




Performance

P-ID-0200

Configuration	Optics	Ind%/ Dir%	Efficiency (%)
1-lamp T8 Uplight	SGL	57/43	73.1
1-lamp T8 Downlight			
1-lamp T5HO Uplight	SGL	60/40	70.0
1-lamp T5HO Downlight			

Mod-22xa™

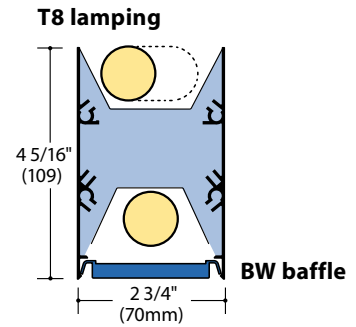


Click on
Quick Find **02id**



litecontrol.com



T5 or T5HO lamping



Mod-22^{xa}

P-S/I-0200

Product description

One-piece extruded aluminum housing with a die-formed steel reflector. The reflector finish is high-reflectance white paint. The direct component opening has a steel blade baffle that is painted white. UL Listed. Cradle to Cradle Certified.^{CM}

Ordering guide

Product, lamping, & length						Options			
P -	S/I -	02	2	8	T5HO -	TCWM -	LP/ELB -	F -	120
Mounting	Distribution	Series	Lamp Count	Nominal Length (ft)	Lamp Type	Finishes	Ballasts	Other Options	Volts
P Pendant-mounted	S/I Semi-indirect	02	1 → 2 → 3 →	4 8 12	T8 T5 T5HO	CAA (clear anodized aluminum) TCWM (textured matte white) are standard see LiteColors™ in product guide for other finishes	ELB10 is std. for T8 LP/ELB is std. for T5 & T5HO DA/MK7 DL/ECO DO/HEL LPD/CS/e see Ballast Options	F LP/EF see Other options	120 277
Mounting - add to end of catalog number Aircraft cables <input type="checkbox"/> FAI/ACC (field adjustable) standard			see notes					notes: Lamp count = total number of lamps in the fixture For ordering guide information in shaded areas, choose selection by reading ACROSS the shaded areas for correct specifications.	

P-S/I-0228T5HO-TCWM-LP/ELB-F-120-FAI/ACC is a typical catalog number for a 2-lamp (1 lamp in cross-section), 8-foot long high output T5 semi-indirect fixture with standard blade white baffle, textured matte white finish, with a electronic T5HO ballast, fuse, 120 volt, mounted with field adjustable aircraft cables.

Finishes

CAA Clear anodized aluminum
TCWM Textured matte white paint

Ballast Options

ELB10 Electronic ballast
LP/ELB Low-profile electronic ballast
DA/MK7 Advance Mark VII dimming ballast
DL/ECO Lutron ECO-10 dimming ballast
DO/HEL Osram Sylvania dimming ballast
LPD/CS/e Lutron EcoSystem dimming ballast

Other Options

F Fuse
LP/EF Low-profile emergency fluorescent ballast

See litecontrol.com for complete product specifications, including details on row joining, system connectors, suspension and mounting for different ceiling types (as applicable).

Note: Litecontrol reserves the right to change specification without notice for product development and improvement.

Click on **Quick Find** **02si**



litecontrol.com




P-S/I-0200



Mod-22xa™



T8 lamping



Performance P-S/I-0200

Configuration	Ind%/Dir %	Efficiency (%)
 1-lamp T8	87/13	79.2
 1-lamp T5HO	87/13	89.0



Click on
Quick Find **02si**



litecontrol.com