

Echelon™



P-ID-3600-jr

Echelon

- Elegant steel housing
- 35" diameter x 3 1/4" deep housing with decorative rings that provide a soft glow around edge of housing
- Lamping: three or six lamps with 39-, 40-, 50- or 55-watt twin-tube compact fluorescent lamps (indirect) and one 21- or 38-watt 2D lamp (direct)

Echelon jr

- Smaller scale fixture with a complementary design to Echelon
- 24 1/2" diameter x 4 1/8" depth spun steel housing with decorative rings
- Shielding options include a flat acrylic diffuser or a spun steel, perforated bowl – both highlighted by a decorative suspended ring
- Lamping: four lamps with 26-, 32- or 42-watt triple-tube fluorescent lamps (indirect) and one 21-watt 2D lamp (direct)







FP Flat acrylic diffuser with suspended ring



PFB Perforated bowl with suspended ring

Performance

P-ID-3600

Configuration	Optics	Ind% / Dir%	Efficiency (%)
 3-lamp BX40/21	FP	89/11	79.3
 3-lamp BX40/21	PFB	98/7	76.6
 6-lamp BX40/21	FP	94/6	76.2
 6-lamp BX40/21	PFB	96/4	74.8

P-ID-3600jr


 3-lamp T42/21-2D	FP	94/6	65.3
 3-lamp T42/21-2D	PFB	98/2	62.9



Suspended Indirect/Direct

P-ID-3600, P-I-36JR

Distribution

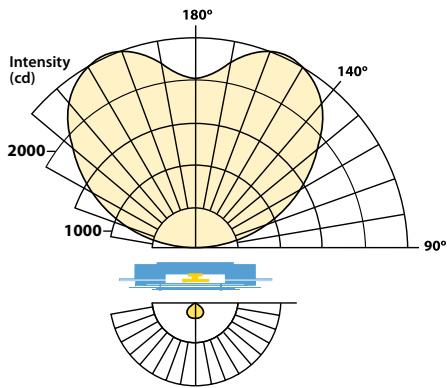

4-lamp 42W triple tube uplight
21 W 2D downlight
Echelon

Echelon™ & Echelon jr™


Part of the Independent family of round fixtures, Echelon offers a thin, layered appearance with decorative rings around and below the spun steel housing. With a separate lamp for the downlight, Echelon has a 35" diameter, and is also available with a 24 1/2" diameter in the Echelon jr version.



p. 169

p. 160

p. 164

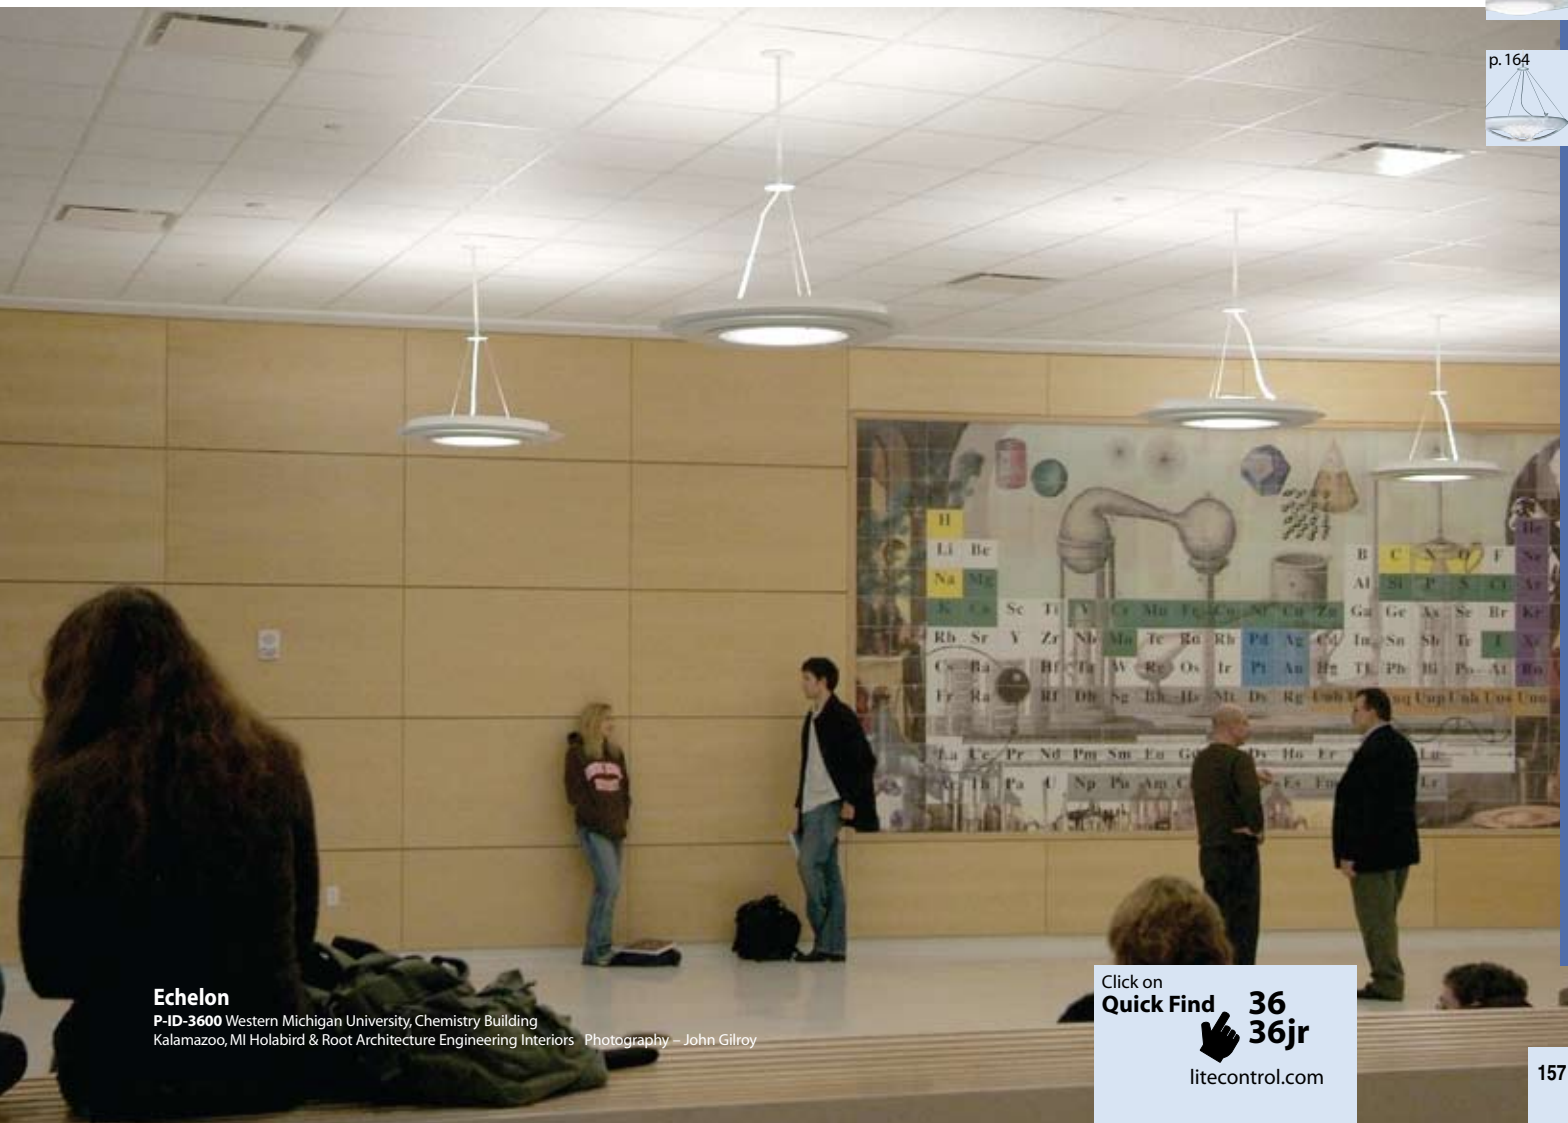

Echelon

P-ID-3600 Western Michigan University, Chemistry Building
Kalamazoo, MI Holabird & Root Architecture Engineering Interiors Photography - John Gilroy



Click on
Quick Find **36**
36jr
litecontrol.com



P-ID-3600-FP

Echelon™

P-ID-3600

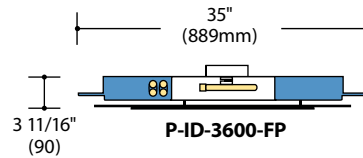

Echelon™

P-ID-3600

Product description

Fixture housing is spun steel, 35" in diameter, with a 12 1/2" diameter downlight opening. The reflector is die-formed specular hammertone aluminum. The uplight component is available with 3 or 6 twin-tube fluorescent lamps (39, 40, 50 or 55 W). The downlight component incorporates a 2D fluorescent lamp (21 or 38 W) with an acrylic diffuser or a perforated bowl. UL Listed. Cradle to Cradle Certified.™

Ordering guide

Product, lamping, & length							Options				
P -	ID -	36	3	0	BX39 /	21-2D	FP-	TCWM -	ELB -	F -	120
Mounting	Distribution	Series	Lamp Count	Nominal Length(ft)	Indirect Lamp Type	Direct Lamp Type	Diffuser	Finish	Ballast	Other Options	Volts
P Pendant-mounted	ID Indirect/ Direct	36	3, 6 →	0	BX39 BX40 BX50 BX55	21-2D 38-2D	FP PFB see Diffuser Options	TCWM (textured matte white) is standard see LiteColors™ in product guide for other finishes	ELB (electronic ballast) see notes	EF F LK see Other options	120 277
SUSPENSION P6S/ACC X" See Planning for Installation for description. Specify Dimension "X" from ceiling to top of fixture with order.							notes: For dimming, please contact factory to determine availability of ballast types and wiring options. For ordering guide information in shaded areas, choose selection by reading ACROSS the shaded areas for correct specifications.				

P-ID-3630BX39/21-2D-FP-TCWM-ELB-F-120-P6S/ACC24" is a typical catalog number for a 3-lamp indirect 39-watt twin-tube compact fluorescent and 1-lamp direct 21-watt 2D compact fluorescent fixture with flat plastic diffuser, textured matte white finish, electronic ballast, fuse 120 volts, and combination stem/cable mounting with 24" suspension.

Diffuser Options

- FP** Flat diffuser
- PFB** Perforated bowl

Other Options

- EF** Emergency fluorescent ballast for BX39 and BX40*
 - F** Fuse
 - LK** Lens kit dust cover
- * Contact factory for EF options with 6-lamp BX50 and BX55

See litecontrol.com for complete product specifications, including details on row joining, system connectors, suspension and mounting for different ceiling types (as applicable).

Note: Litecontrol reserves the right to change specification without notice for product development and improvement.

Click on
Quick Find 36




litecontrol.com

P-ID-3600, P-I-36JR



P-ID-36JR-FP

Echelon jr™



Echelon™

P-ID-36JR

Product description

Fixture housing is spun steel, 24 1/2" in diameter. The reflector is die-formed specular hammertone aluminum. The uplight component is available with 4 twin-tube fluorescent lamps (26, 32 or 42 W). The downlight component incorporates a 21 Watt 2D fluorescent lamp with an acrylic diffuser or a perforated bowl. UL Listed. Cradle to Cradle Certified.™

Ordering guide

Product, lamping, & length							Options				
P -	ID -	36JR	4	0	T26 /	21-2D	FP-	TCWM -	ELB -	F -	120
Mounting	Distribution	Series	Lamp Count	Nominal Length(ft)	Indirect Lamp Type	Direct Lamp Type	Diffuser	Finish	Ballast	Other Options	Volts
P Pendant-mounted	ID Indirect/ Direct	36JR	4 →	0	T26 T32 T42	21-2D	FP PFB see Diffuser Options	TCWM (textured matte white) is standard see LiteColors™ in product guide for other finishes	ELB is standard DA/MK7 see Ballast Options	F see Other Options	120 277
Mounting Options - add to end of order number <input type="checkbox"/> P6S/ACC standard <input type="checkbox"/> P6S			notes: For ordering guide information in shaded areas, choose selection by reading ACROSS the shaded areas for correct specifications.								

P-ID-36JR40T26/21-2D-FP-TCWM-ELB-F-120-P6S24" is a typical catalog number for a 4-lamp indirect 26-watt triple-tube compact fluorescent and 1-lamp direct 21-watt 2D compact fluorescent fixture with flat plastic diffuser, textured matte white finish, electronic ballast, fuse, 120 volts, and stem mounting with 24" suspension.

Diffuser Options

FP Flat diffuser
PFB Perforated bowl

Ballast Options

ELB Electronic ballast
DA/MK7 Dimming electronic ballast, Advance Mark VII

Other Options

F Fuse

