


INSTALLATION
INSTRUCTIONS

FIXTURE TYPE _____ LITECONTROL

P110961

PG 1 OF 1

DO NOT MODIFY OR ALTER THIS PRODUCT IN ANY WAY, OR INSTALL IN ANY FASHION WHICH IS CONTRARY TO THE INSTRUCTIONS CONTAINED HEREIN. IF YOU HAVE ANY QUESTIONS REGARDING THIS PRODUCT OR THE INSTALLATION OF IT, PLEASE CALL LITECONTROL ENGINEERING AT 781-294-0100.

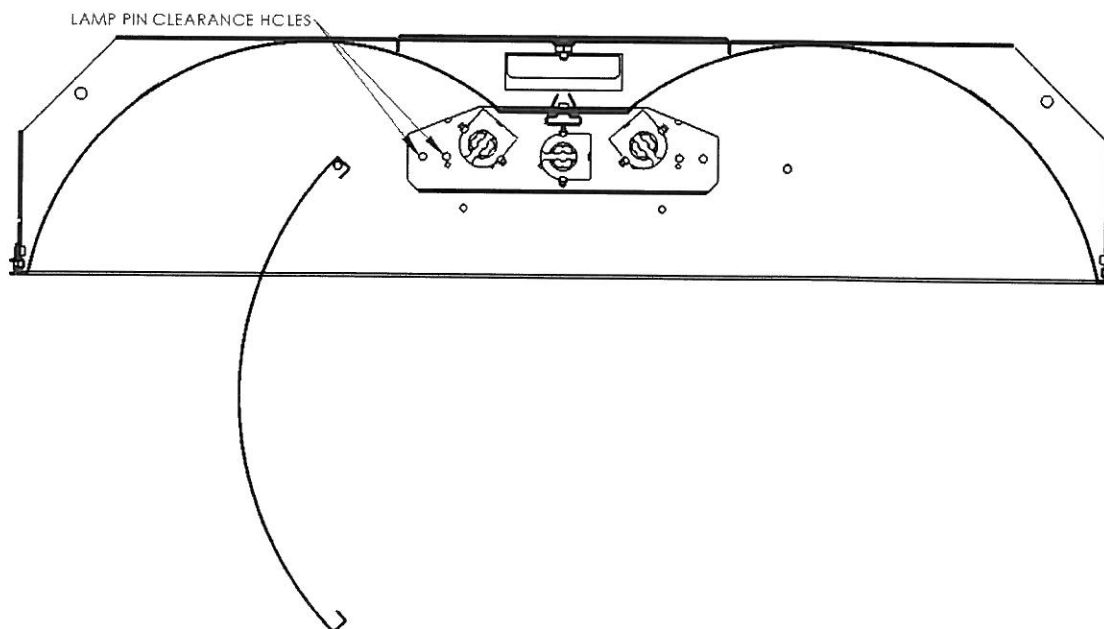

GENERAL NOTES:

- A) READ ENTIRE INSTRUCTION SHEET BEFORE INSTALLATION.
- B) FIXTURES ARE INTENDED FOR INSTALLATION IN AN EXPOSED INVERTED T-BAR GRID CEILING.
- C) THE FIXTURE AS PROVIDED IN THE CARTON IS COMPLETELY WIRED AND ASSEMBLED. BALLAST LINE LEADS AND GROUNDING CONDUCTOR HAVE BEEN BROUGHT OUT THROUGH THE OPENING IN THE TOP OF THE FIXTURE AND TAPED UNDERNEATH THE ACCESS COVER PLATE SO THAT IT IS NOT NECESSARY TO REMOVE THE BALLAST COVER FOR INSTALLATION.
- D) 1/4" DIA HOLES HAVE BEEN PROVIDED ON THE END HEADERS AT THE UPPER (4) CORNERS OF THE FIXTURE FOR INSTALLATION OF SUPPLEMENTARY CHAIN OR WIRE SUPPORT AS MAY BE REQUIRED BY LOCAL CODES.
- E) THIS FIXTURE MUST BE INSTALLED IN STRICT ACCORDANCE WITH THE NEC AND ALL LOCAL CODES.
- F) THE REFLECTOR FINISH IS IMPERVIOUS TO DUST AND DIRT IN NORMAL ENVIRONMENTS, AND FOR MOST APPLICATIONS, DUSTING WITH A DRYCLOTH IS SUFFICIENT. HEAVIER SOILS OR FILMS USUALLY MAY BE REMOVED WITH A NON-DETERGENT LIQUID SOAP SOLUTION FOLLOWED BY A CLEAR WATER RINSE. STRONG ALKALINE OR ACID CLEANERS OR HARSH ABRASIVES SHOULD NOT BE USED.

INSTALLATION:

1. REMOVE FIXTURE FROM CARTON AND PACKAGING MATERIAL: AVOID HANDLING REFLECTOR SURFACES, AS FINGERPRINT SMUDGES WILL NEED CLEANING AFTER INSTALLATION.
2. LIFT FIXTURE DIAGONALLY THROUGH THE OPENING ABOVE CEILING GRID AND REST IT ON THE T-BARS. PLACE BENDING TABS OVER T-BAR SO THAT FIXTURE IS SECURE FROM FALLING OUT OF GRID.
3. LOOSEN ACCESS COVER SCREWS AND SLIDE COVER OUT THRU KEYHOLES. REMOVE A KNOCKOUT IN COVER AND ATTACH THE FLEXIBLE CONDUIT FEED (BY E.C.). REMOVE TAPE HOLDING FIXTURE WIRES AND MAKE WIRING CONNECTIONS. CAREFULLY PUSH WIRE CONNECTIONS BACK INTO HOUSING AND RE-INSTALL ACCESS COVER.
4. LAMP INSTALLATION: (LAMPS PROVIDED BY OTHERS) OPEN BASKET BY FREEING ONE SIDE AND LETTING HANG FROM THE FIXTURE BY THE REMAINING SIDE. CLOSE BASKET AFTER LAMP INSTALLATION.
FOR T8 LAMPS: INSERT LAMP IN AT ONE END INTO CLEARANCE HOLES IN END OF FIXTURE, SHIFT LAMP INTO POSITION AND CAREFULLY PUSH LAMP PINS INTO SOCKETS.

