

Bridge™

P-ID-D205

Pendant-Mounted Indirect/Direct

- ▶ A luminous box with no corners, supported by central bridges of aluminum
- ▶ Minimalistic individual fixtures in five colors
- ▶ Available with one or two medium screw-base lamps

Specifications


Housing. Acrylic panels, available in five colors: Red (**RED**), Orange (**ORN**), Mocha (**MOC**), Green (**GRN**), and Blue (**BLU**), internally connected by aluminum rods.

Lamping. One or two ceramic medium screw-base lampholder(s) provided for maximum 60-watt incandescent or self-ballasted fluorescent with E26 base (by others). Recommended incandescent lamp: 40G16.5 (medium base, clear).

Suspension. Two field adjustable 51" aircraft cables attached to a single canopy that mounts to a standard 3 1/2" ceiling junction box. 87" or 219" cable lengths are also available. Feed cord is comprised of striped conductors in a clear jacket for an exposed look. Fixtures ship with feed cord attached.

Certification. Fixture and electrical components shall be UL and/or CUL Listed. 

Note: Litecontrol reserves the right to change specifications without notice for product development and improvement.

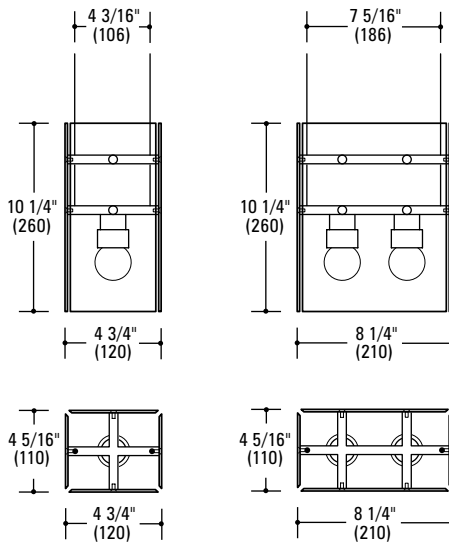

Ordering Guide

Product, Lamping, & Length

P -	ID -	D205	1	0	E26 -
Mounting	Distribution	Series	Lamp Count	Nominal Length	Lamp Type
P Pendant-Mounted	ID Indirect/Direct	D205	1 2	0	E26

Options

ORN -	120
Housing Color	Voltage
RED ORN MOC GRN BLU	120

P-ID-D20510E26-ORN-120 is a typical catalog number for a 1-lamp pendant-mounted fixture with orange housing color, 120 volts.





Georges Seris,
Designer